


The Builtrite, 1.3 Yard Capacity, Free Hanging, Clamshell Grapple is designed for re-handling aggregate and other fine materials. It is designed for excavators and material handlers from 15-30 metric tons. Built with 100,000 KSI, yield strength steel in its grapple arms and using AR 500 abrasion resistant tine tips, this grapple is designed to perform in extreme conditions, providing maximum durability and low maintenance, reducing your downtime. Key features include:

- Heavy duty rotation using a high torque motor and heavy duty bearing.
- Grapple arms constructed of high strength, abrasion resistant steel. Tine tips made from AR 500 plate for maximum wear resistance.
- Oversized, hardened cylinder and pivot pins with aluminum bronze bushings.
- Easily accessible, yet well protected grease zerks.

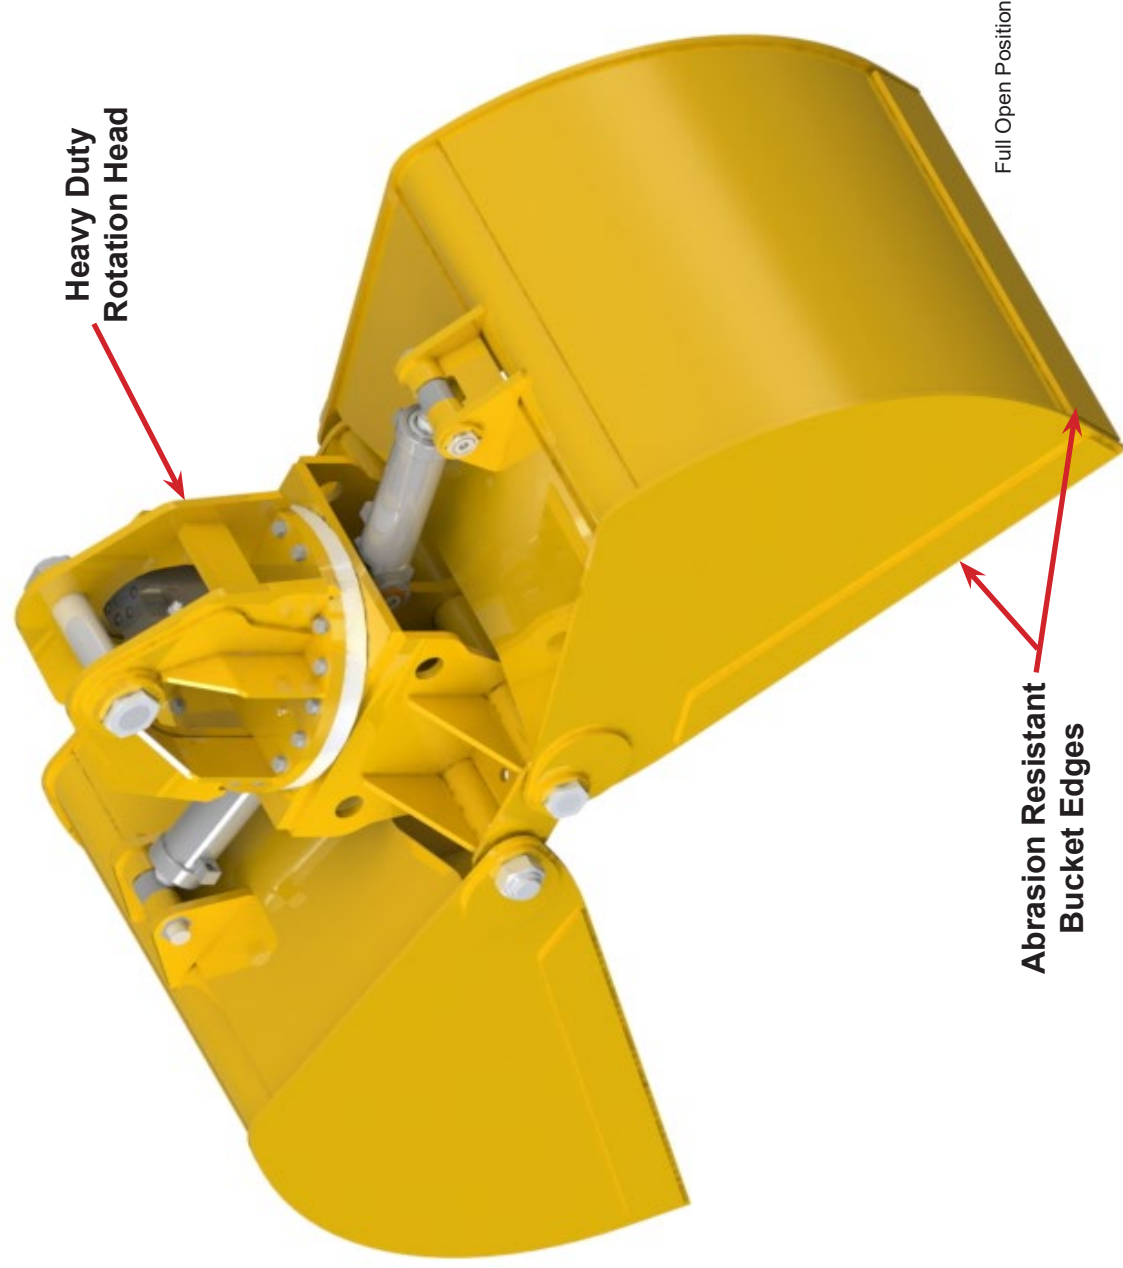

Builtrite Lemco

530 Recycle Center Drive
Two Harbors, MN 55616

 **218-834-5555**  sales@builtrite.com  www.builtrite.com


P/N 1.3 Clamshell Grapple 6-19-2026 © June 2026



TENAMEC
ENGINEERED TOUGH

1.3 Yard, Clamshell Grapple Specifications

Model	Weight		(A)		(B)		(C)		(D)		(E)		(F)		(G)		(H)	
	Lbs.	Kg.	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
1.3 Yd Clamshell	2,630	1,195	56	1,422	77	1,956	76	1,930	87	2,210	62	1,575	66	1,676	37	940	41	1,042

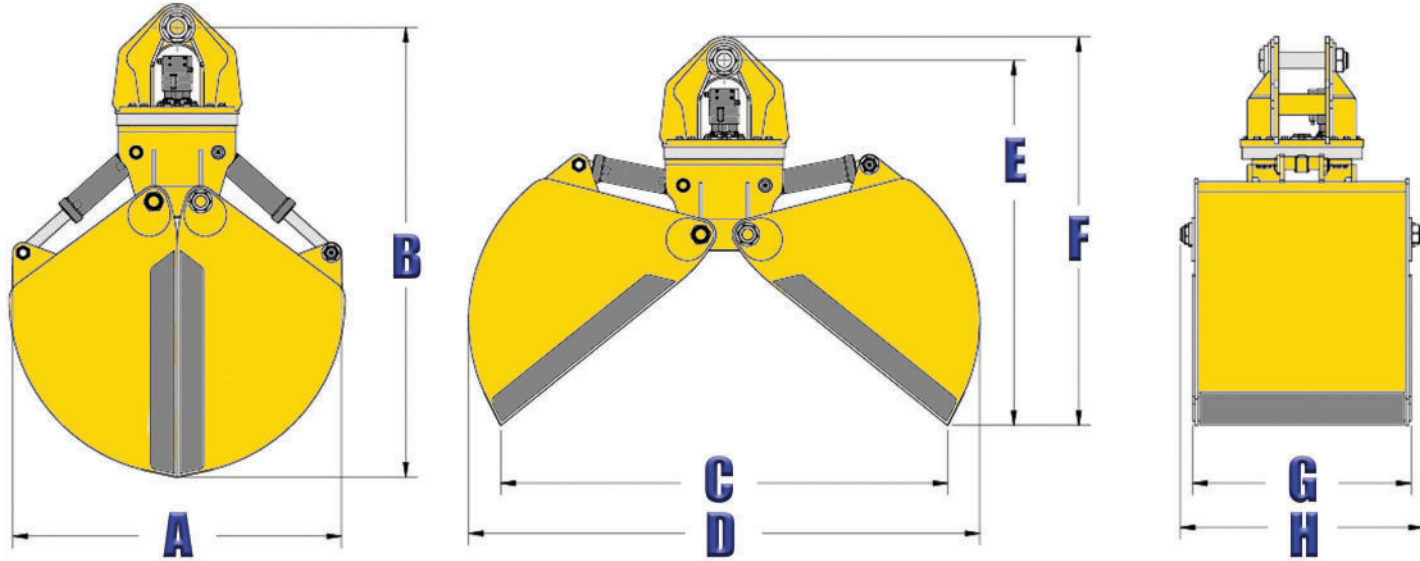

BUILTRITE LEMCO RESERVES THE RIGHT TO CHANGE SPECIFICATIONS AND PRICES WITHOUT NOTICE IN ORDER TO FOLLOW ITS POLICY OF CONSTANTLY STRIVING TO MANUFACTURE A BETTER PRODUCT WITHOUT INCURRING ANY LIABILITY TO PROVIDE THESE NEW FEATURES ON ANY UNITS PREVIOUSLY MANUFACTURED.

