




Log Grapples

46" Log / Pole Grapple

The LEMCO™, Log / Pole Handling Grapple is designed for heavy duty use, capable of handling both wooden logs and poles. The heavy duty design provides maximum durability and low maintenance, reducing your downtime. This grapple works well with Lemco's Model XLT 170 truck mounted loader as well as most truck mounted knuckle boom loaders, rough terrain carriers, forwarders and stationary electric material handlers. Key features include:

- 360° continuous rotation, using a tried and true, extremely reliable, vane style rotator
- Grapple halves have a unique profile that aid in curling logs into the grapple's throat, maximizing each load.
- A 46" wide opening, closes down to 4", allowing for handling a wide range of logs with varying diameters.
- All pivot points contain greasable and replaceable bushings for long life and prevent parent material degradation.
- Heavy duty cylinders are designed for high duty cycles.
- This grapple features high strength steel throughout and torque tubes on each jaw, making it extremely durable in heavy duty applications.
- Optional Tine Wraps allow the grapple to grab poles, without causing damage to them.

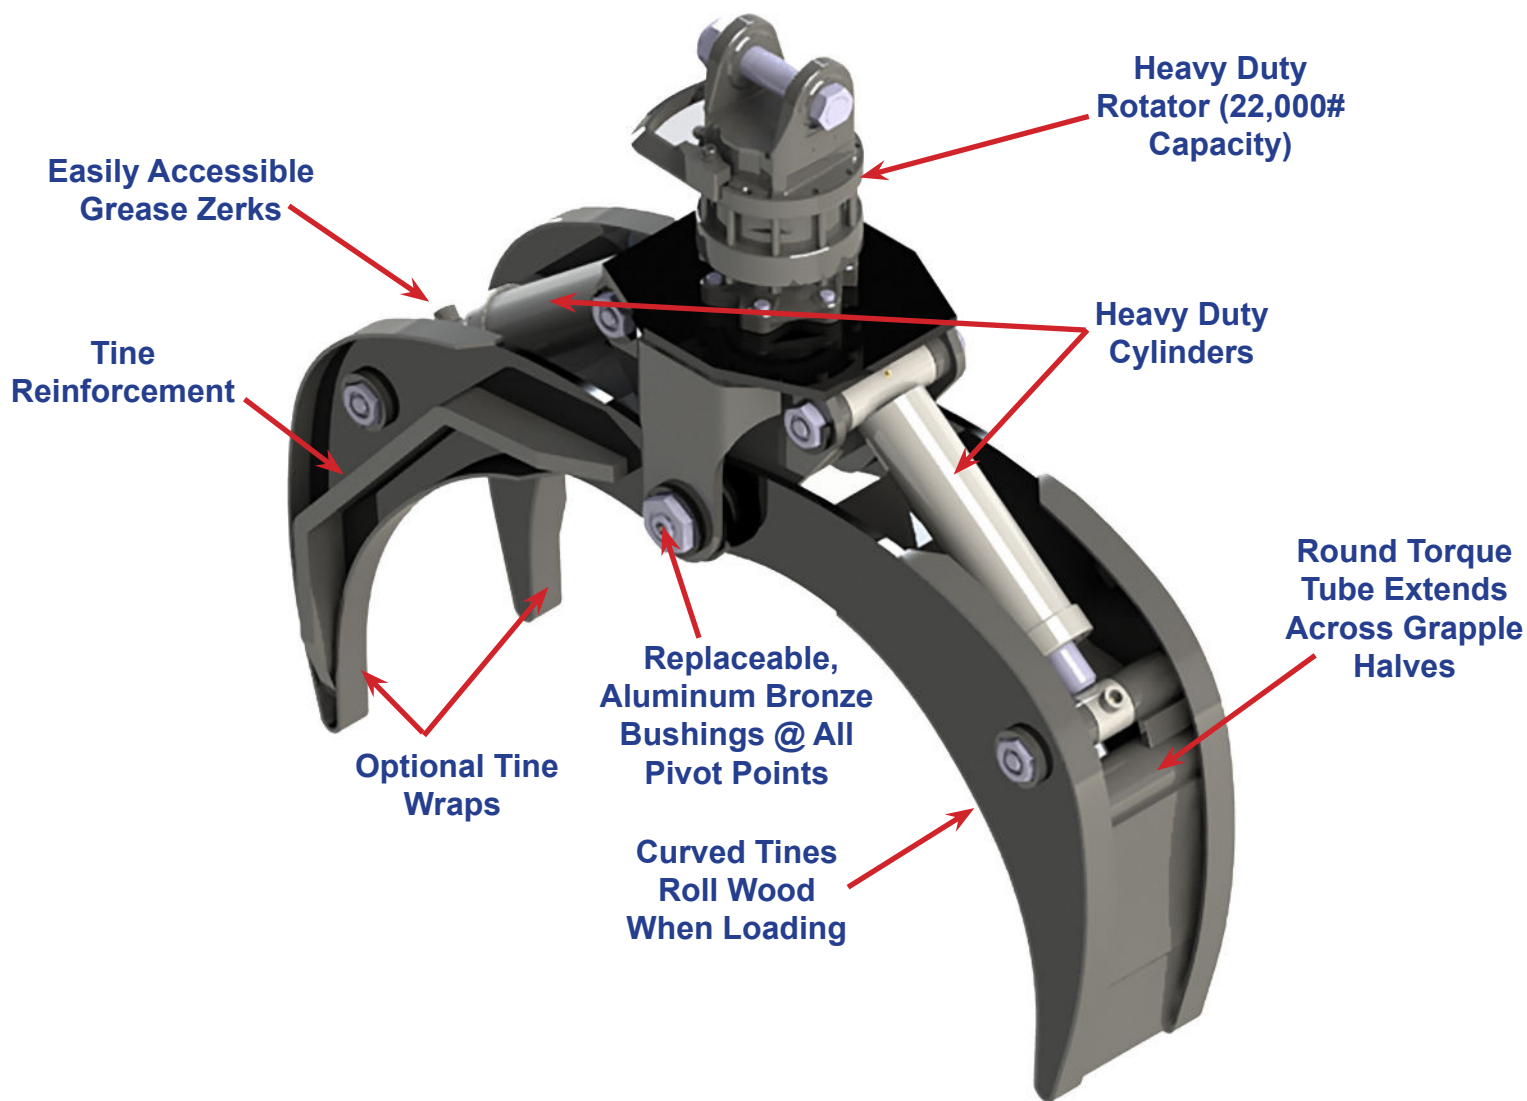

Builtrite Lemco
530 Recycle Center Drive
Two Harbors, MN 55616

☎ 218-834-5555 ✉ sales@builtrite.com 🌐 www.builtrite.com

P/N LEMCO 46" Log Grapple 11-5-2025






TENAMEC

ENGINEERED TOUGH

46" Log / Pole Grapple Specifications

Model	*Weight		Opening (A)		Width When Open (B)		Opening Height (C)		Height To Rotator (D)		Jaw Height @ Full Open (E)		Close Height (F)		Width When Closed (G)		Gap @ Full Close (H)		Jaw Width - Center Tine (I)		Width Outside Tines (J)	
	Lbs.	Kg.	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
LPG 46	900	409	46	1,168	55	1,397	49	1,245	36	914	22	559	23	584	58	1,473	6	152	11	279	18	457

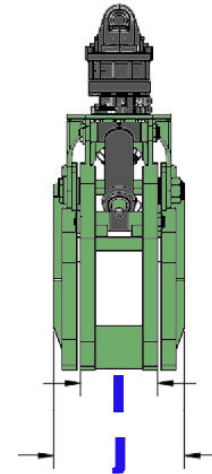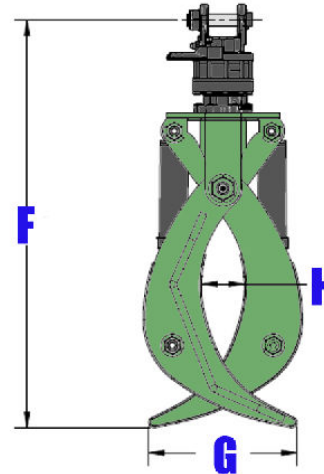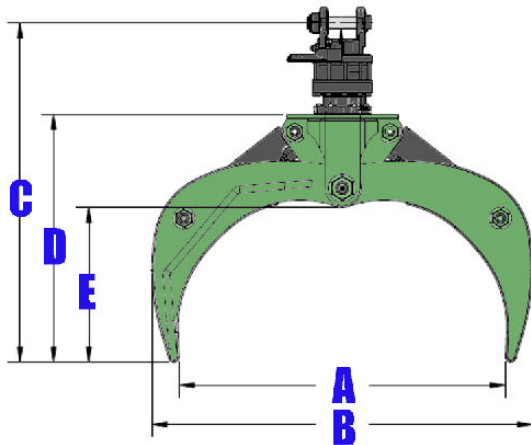

HYDRAULIC REQUIREMENTS		
	Max. Flow GPM / LPM	Max. Pressure PSI / Bar
46" Log / Pole Grapple		
Open / Close	20 / 75	3500 / 241
Rotation	6 / 23	1750 / 121



BUILTRITE LEMCO RESERVES THE RIGHT TO CHANGE SPECIFICATIONS AND PRICES WITHOUT NOTICE IN ORDER TO FOLLOW ITS POLICY OF CONSTANTLY STRIVING TO MANUFACTURE A BETTER PRODUCT WITHOUT INCURRING ANY LIABILITY TO PROVIDE THESE NEW FEATURES ON ANY UNITS PREVIOUSLY MANUFACTURED.

