
BUILTRITE™ HANDLERS & ATTACHMENTS

Waste Grapples

Municipal Trash Grapple

The Builtrite Lemco, Municipal Trash Grapple is designed for municipalities and private contractors alike to pick up roadside waste, brush, white goods, animal carcasses, etc. The heavy duty design provides maximum durability and low maintenance, reducing your downtime. This grapple works well with most truck mounted knuckleboom loaders as well as smaller sized excavators. Key features include:

- **Continuous, Heavy Duty Rotation -** Our rotators have proven themselves to be extremely reliable, providing long life with minimal maintenance requirements.
- **Wide Jaw Opening & Two Width Options -** For handling large volumes of material and jaw profile that allows grapple to reach along the inside panels of dump boxes, roll-off containers, etc.
- **Strong, Durable & Lightweight -** The jaws feature external ribbing and a round torque tube, allowing the structure to be light, yet extremely strong.
- **Low Profile -** When fully open, the grapple has a very low profile, making ideal for resting on top of debris in dump bodies.
- **Replaceable Bushings -** All pivot points feature replaceable pins and bushings.

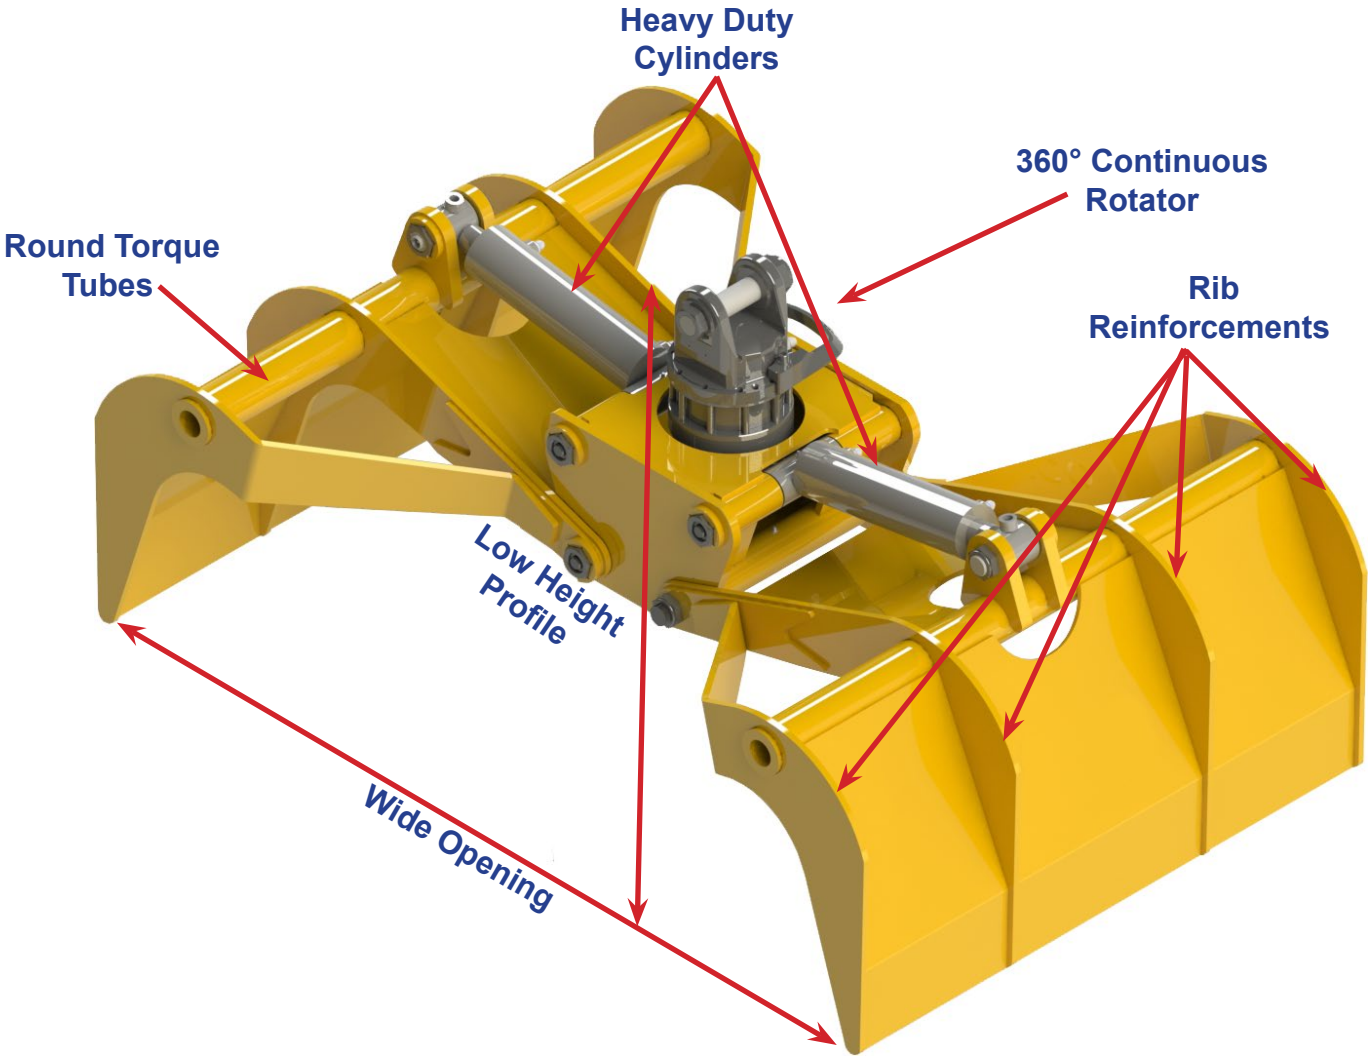

48” Wide Version Shown. 32” & 42” Available.


Builtrite Lemco
530 Recycle Center Drive
Two Harbors, MN 55616
218-834-5555 sales@builtrite.com www.builtrite.com

Made In U.S.A.

TENAMEC ENGINEERED TOUGH

P/N Municipal Waste Grapple 11-9-2026 © November 2026

Municipal Trash Grapple Specifications

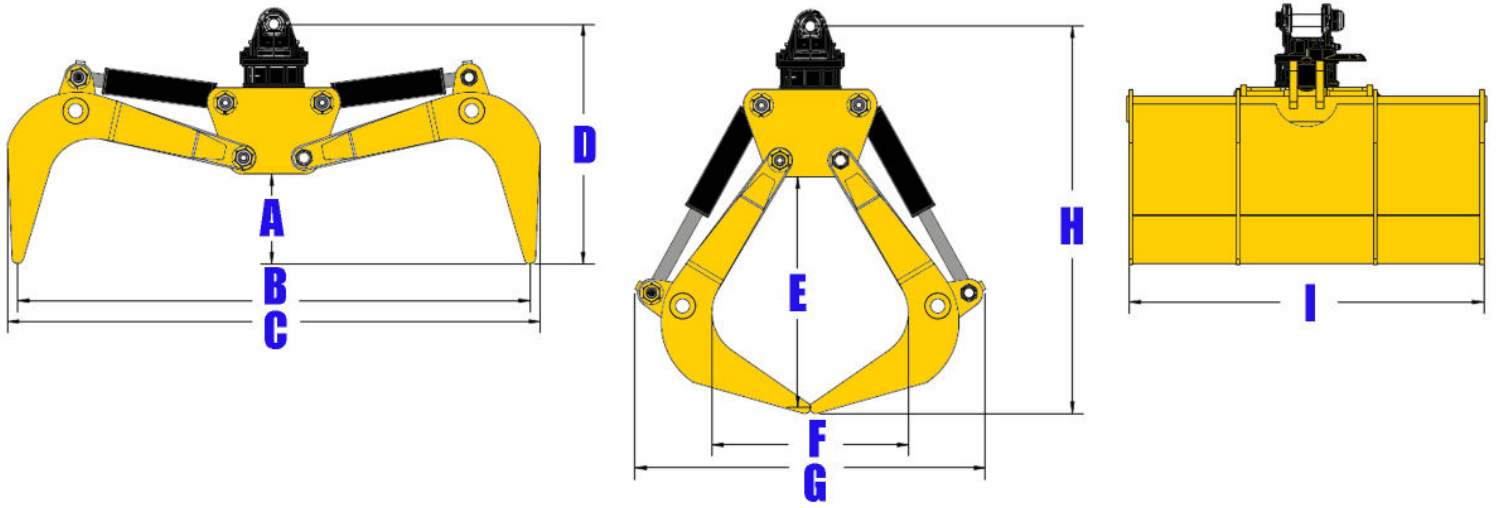

Model	Weight		(A)		(B)		(C)		(D)		(E)		(F)		(G)		(H)		(I)	
	Lbs.	Kg.	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
MTG 32	1,100	500	12	305	71	1,803	73	1,854	33	838	32	813	27	686	48	1,219	53	1,346	32	813
MTG 42	1,200	545	12	305	71	1,803	73	1,854	33	838	32	813	27	686	48	1,219	53	1,346	42	1,067
MTG 48	1,250	568	12	305	71	1,803	73	1,854	33	838	32	813	27	686	48	1,219	53	1,346	48	1,219

HYDRAULIC REQUIREMENTS		
	Max. Flow GPM / LPM	Max. Pressure PSI / Bar
Municipal Trash Grapple		
Open / Close	20-25 / 76-95	2500-4000 / 172- 280
Rotation	6 / 23	1800 / 124







BUILTRITE LEMCO RESERVES THE RIGHT TO CHANGE SPECIFICATIONS AND PRICES WITHOUT NOTICE IN ORDER TO FOLLOW ITS POLICY OF CONSTANTLY STRIVING TO MANUFACTURE A BETTER PRODUCT WITHOUT INCURRING ANY LIABILITY TO PROVIDE THESE NEW FEATURES ON ANY UNITS PREVIOUSLY MANUFACTURED.

BUILTRITE